

5000i

Side Entry  
0LX5551D(220v)

Rear Entry  
044251D (220v)



# FEATURES

- Clear & informative graphic display
- Highest grade HEPA and carbon technology
- Automatic electronic flow control - maintains a constant extraction rate even as the filter blocks
- Gas and particle sensors to warn the operator
- Adjustable airflow

## SPECIFICATIONS

<b>Voltage</b>		<b>220v</b>	<b>400v</b>
Side Entry	Volume Part Number	0LX5551D	0LX5550D
	Vacuum Part Number	044251D	044250D
Rear Entry	Volume Part Number	0LX5565D	0LX5549D
	Vacuum Part Number	044265D	044261D
Wattage		7.5kW	7.5kW
Frequency		50Hz / 60Hz	50Hz / 60Hz
Cabinet Height		1804mm	1804mm
Cabinet Width		1250mm	1250mm
Cabinet Depth		892mm	892mm
Cabinet Weight		400kg	400kg
Sound Level		65dBa	65dBa
Airflow		5000m3/h	5000m3/h

## INCLUDED AS STANDARD...


### FILTERS



**Main Filter**  
**Code** MPEF-110633  
**Description** HEPA



**Main Filter**  
**Code** MPEF-110627  
**Description** Chemical



**Pre-filter** **Side Inlet Only**  
**Code** MPEF-111006  
**Description** F8/F9 Labyrinth



**Pre-filter** **Rear Inlet Only**  
**Code** MPEF-111144  
**Description** EU5 Pleated Bag



**Pre-filter**  
**Code** MPEF-200310  
Single200029  
**Description** G4 Pad

Find out more:



[www.FumeFiltration.com](http://www.FumeFiltration.com)



[sales@fumefiltration.com](mailto:sales@fumefiltration.com)



[sales@jorilnk.com](mailto:sales@jorilnk.com)

**(336)288-1613**

*Connection kits are available see overleaf for options*

*Machine Supplied With • 2 x Main Filters • 1 or 2 x Pre-filters • 1 x 4.5m Fixed Power Cable (no plug) • 1 x Manual*


# OPTIONS

## Main Filter

**Code:**  
MPEF-110624

**Description:**  
Chemical

## Connection Kits

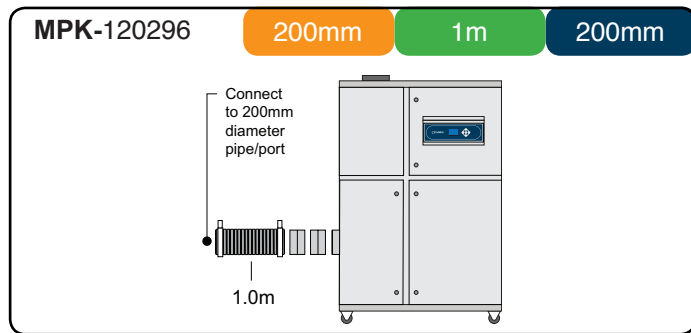


Hose End Diameter

Hose Length

Purex Inlet Diameter

*If you do not see a connection kit that fits your machine or pipework, please contact Purex or your representative*

## Interfacing




Interfacing can remotely start the Purex machine when the connected machine starts.

Interfacing can also warn the connected machine when the Purex machine is in alarm.


*Take a look through our Interfacing Guide to see our extensive range of options*

# TECHNICAL

Rear Inlet

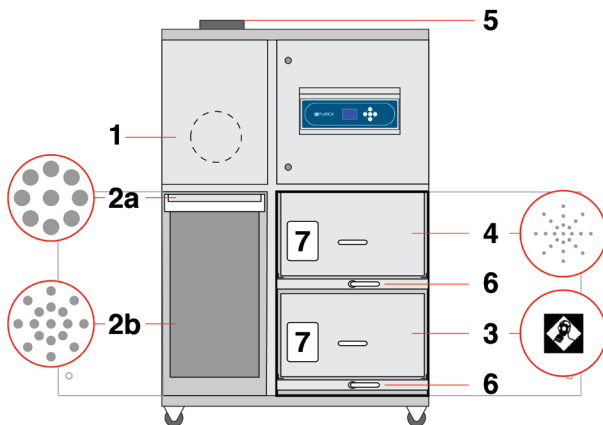

Side Inlet

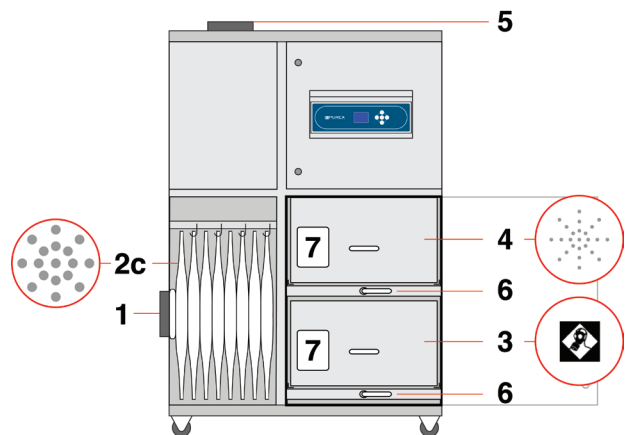

**LEGEND:**

- 1. Air inlet - 200mm safe seal
- 2a. Pre-filter pad
- 2b. Pre-filter pleated bag
- 2c. Pre-filter Labyrinth bag

- 3. Main filter (carbon location)
- 4. Main filter (HEPA location)
- 5. Clean air returned to the workplace
- 6. Filter locking handles
- 7. Filter identification labels

**FUME FILTRATION**



T. 336-288-1613    eMail: Sales@fumefiltration.com

Jorlink USA, Inc, 3714 Alliance Dr.,  
Suite 100  
Greensboro, NC 27407  
sales@jorlink.com  
sales@fumefiltration.com  
Tel (336) 288-1613