




Epoxy coated to prevent corrosion

SPECIFICATIONS

Voltage	120v	230v
Part Number	0PV4013D	0PV4010D
Wattage	1.2kW	1.2kW
Frequency	50Hz / 60Hz	50Hz / 60Hz
Cabinet Height	1195mm	1195mm
Cabinet Width	465mm	465mm
Cabinet Depth	528mm	528mm
Cabinet Weight	70kg	70kg
Sound Level	<60dBa	<60dBa
Airflow	400m ³ /h	400m ³ /h

Find out more:

 www.purexusa.com
 sales@purexusa.com
 +1 (336) 288-1613

FEATURES

- Clear & informative graphic display
- Highest grade HEPA and carbon technology
- Automatic electronic flow control - maintains a constant extraction rate even as the filter blocks
- Gas and particle sensors to warn the operator
- Adjustable airflow

INCLUDED AS STANDARD...

FILTERS



Main Filter
Code
MPEF-113498

Description
HEPA/Chemical



Pre-filter
Code
MPEF-111097

Description
F8/F9 Labyrinth



Pre-filter
Code
MPEF-200037

Description
Chemical
Absorbant Pad

CONNECTION KIT

*Connection kit is included
see overleaf for options*

OPTIONS

Main Filter

Code:
MPEF-113450

Description:
HEPA/ Twin Chemical

Pre-filter

Code:
MPEF-111057

Description:
F6 Labyrinth

Connection Kits

Hose End
Diameter

Hose
Length


Purex Inlet
Diameter

Code: 100032

50mm

3m

80mm




Code: 100043C

50mm

6m

80mm

Epoxy coated to prevent corrosion




Code: 120299

80mm

3m

80mm




Code: 120288

100mm

2.3m

80mm

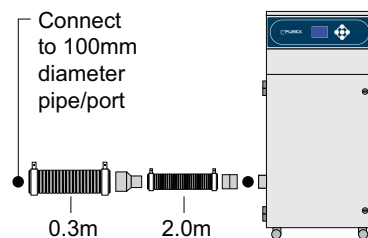


Code: 120297

100mm

2m

80mm

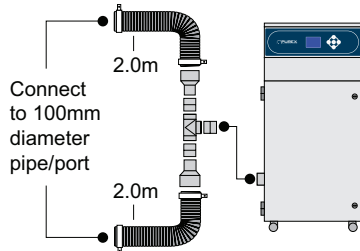


Code: 100171

125mm


3m

80mm

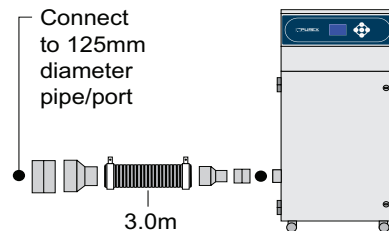

If you do not see a connection kit that fits your machine or pipework, please contact Purex or your representative

Interfacing



Interfacing can remotely start the Purex machine when the connected machine starts.

Interfacing can also warn the connected machine when the Purex machine is in alarm.

Take a look through our Interfacing Guide to see our extensive range of options



Jorlink USA, Inc.
3714 Alliance Dr., Ste 100
Greensboro, NC 27407 USA