

The Future of Fume Extraction

0LX4013D (120V) 0LX4010D (230V)

400i

٠

FEATURES

- Clear & informative graphic display
- Highest grade HEPA and carbon technology
- · Automatic electronic flow control maintains a constant extraction rate even as the filter blocks
- Gas and particle sensors to warn the operator
- Adjustable airflow

INCLUDED AS STANDARD...

			0
F.		к	5
			-



- **Main Filter** Code MPEF-113505
- **Description HEPA/Chemical**



Pre-filter Code MPEF-202268 Single111057

Description F6 Labyrinth

CONNECTION KIT

Connection kit is included see overleaf for options

SPECIFICATIONS

Voltage	120v	230v	
Volume Part Number	0LX4013D	0LX4010D	
Vacuum Part Number	080411ID	080410ID	
Wattage	1.2kW	1.2kW	
Frequency	50Hz / 60Hz	50Hz / 60Hz	
Cabinet Height	1070mm	1070mm	
Cabinet Width	465mm	465mm	
Cabinet Depth	528mm	528mm	
Cabinet Weight	60kg	60kg	
Sound Level	<60dBa	<60dBa	
Airflow	400m3/h	400m3/h	


Find out more:



www.FumeFiltration.com sales@fumefiltration.com sales@jorilnk.com (336) 288-1613

Machine Supplied With • 1 x Main Filter • 1 x Pre-filter • 1 x Connection Kit • 1 x Power Cable • 1 x Manual

OPTIONS

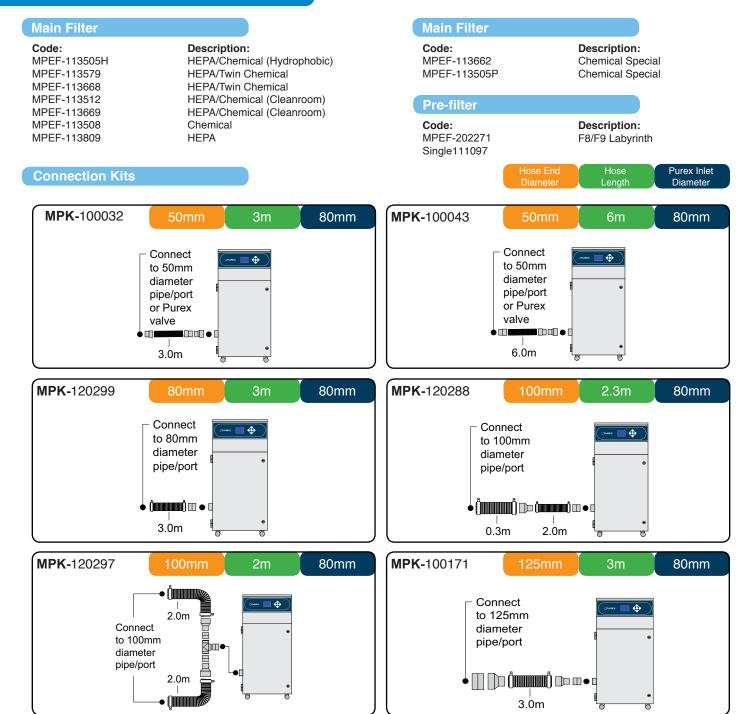

If you do not see a connection kit that fits your machine or pipework, please contact Purex or your representative

Interfacing



FUME FILTRATION

T. 336-288-1613 eMail: Sales@fumefiltration.com

Interfacing can remotely start the Purex machine when the connected machine starts.

Interfacing can also warn the connected machine when the Purex machine is in alarm.

Take a look through our Interfacing Guide to see our extensive range of options

Jorlink USA.Inc, 3714 Alliance Dr., Suite 100

Greensboro, NC 27407

sales@jorlink.com sales@fumefiltration.com

> Tel (336) 288-1613 REV 090324 EDU