

Optional Items

26501112G(06)



Pass-through Door Switch Module



Rotary Attachment



SmartAIR Nozzle



SmartGUARD™ Fire Alarm (Patented)



External Control Interface Board



SmartPRINT™



Flame Sprinkler System




SmartBOX™ Cutting Accessory



Air Compressor Unit



Fume Extraction System



External Signal Indicator



GCC LaserPro Spirit LS

Smart Innovative Evolution at Its Best

Specification

Spirit LS

Work Area	640 x 460 mm (25 x 18 in.) Extendable to 740 x 460 mm (29 x 18 in.)	
Max. Part Size (L x W x H)	All doors closed	762 x 482.6 x 165 mm (30 x 19 x 6.5 in.)
	All doors open	762 x ∞ x 165 mm (30 x ∞ x 6.5 in.)
Dimensions (W x D x H)	1125 x 720 x 1005 mm (44.3 x 28.3 x 39.6 in.)	
Laser Source	12 to 100W 10.6-μm sealed CO2 Laser / 20W & 60W 9.3-μm sealed CO2 Laser	
Cooling	Air-cooled, Operating environment temperature 15°-30°C (60°-86°F)	
Drive	Closed-loop DC servo control	
Maximum Motor Speed	80 IPS**	
Speed Control	Adjustable from 0.1-100% (Up to 16 color-linked speed settings per job)	
Power Control	Adjustable from 0-100% (Up to 16 color-linked power settings per job)	
Engraving Capability	256-level gray scale image processing capability	
Distance Accuracy	0.254 mm or 0.1% of move, whichever is greater	
Z-Axis Movement	Automatic	
Focus Lens	Standard 2.0", optional 1.5", 2.5", & 4.0" available	
Resolution (DPI)	Available 125, 250, 300, 380, 500, 600, 760, 1000, 1500	
Interface	10 Base-T Ethernet	
	USB Type-A 2.0 – For USB storage (Max. 32GB capacity, FAT file system) USB Type-B 2.0 – For connecting with the computer	
Compatible Operating Systems	MS Windows	
Display Panel	4-line LCD display showing current file name, total working time, laser power, engraving speed, file(s) loaded into memory buffer, setup and diagnostic menus	
Safety	Class I Laser Product Compliant with EN60825, Class II Laser Product Compliant with CDRH, 2006/42/EC Machinery Directive Compliance Class 4 Laser Product Compliant with CDRH with the optional pass-through door module	
Operation Voltage	Laser below 80Watt, 100-240VAC, 50-60Hz Auto Switching, Max. 15A Laser 80Watt and above, 200-240VAC, 50-60Hz, Max. 15A	
Fume Extraction System	External exhaust system with minimum flow rate 640m³/h (CFM 377 ft³/min) is required, 2.3kPa negative pressure (Pure-Air PA-1000FS @ 4" exhaust port)	

* Speed does not equal to throughput. See dealer or visit www.GCCworld.com for more details.

** For 30W and above models, (60 IPS for 12W & 25W models)

Δ Specifications are subject to change without prior notice.

* The flow rate is determined by a default fume extraction system;

the flow rate may vary due to a different fume extraction system.

***Please use certified brands by GCC for LaserPro USB storage, kindly refer to GCC

User Manuals for more details.



LASER RADIATION -
AVOID DIRECT EYE EXPOSURE
CLASS II LASER PRODUCT
LASER DIODE 0.8mW MAX
OUTPUT AT 640-650nm
Classified by EN 60825-1:2014-A1:2012-A2:2011 LASER CLASS II




Authorized Dealer



www.jorlink.com
sales@jorlink.com

Tel (336) 288-16-13



Spirit LS

- 640 x 460 mm (25 x 18 in.) working area
- Up to 80 IPS high working speed
- Patented SmartACT™ motion control technology for higher throughput
- Closed-loop DC servo motor for precise movement of laser carriage
- Reliable DuraGuide motion system with reinforced Kevlar belt delivers superb output quality
- Pass-through front and rear doors to accommodate long working pieces (optional)
- Plug and play standard USB port for rapid data transmission
- Patented SmartGUARD™ fire alarm device to provide maximum operation safety



Anodized Metal

Signage

Stone / Tile

Acrylic

Leather

Textile / Apparel

Laser Engraver

GCC LaserPro Spirit LS



GCC LaserPro Spirit LS

LaserPro Spirit LS distinguishes itself from the competition by combining output quality, reliability, and user-friendliness. With an abundance of useful and innovative features, the Spirit LS sets the standard as the industrial benchmark for laser engravers.

www.jorlink.com

sales@jorlink.com

tel(336) 288-16-13

DuraGuide

Systematic and reliable motion system embedded with strong mechanical framework, reinforced Kevlar belts, and accurate servomotor control technology to deliver superb output quality under rapid movement.



SmartPIN AutoFocus (Patented)

The plug-and-play probe design makes focusing a one-touch process and provides the accuracy and precision required for optimum quality in the lasing process.

SmartLID™ (Patented)

An innovative lid that opens from both ends allowing easier access for daily maintenance.



Pass-through Front and Rear Doors (Optional)

Optional front and rear door design enables loading of extremely long working pieces.

SmartACT™ (Patented)

Ground-breaking technology that reduces the ramping process, the job running time, which translates into higher productivity.




Key Switch & Emergency Stop

Key switch safeguards the machine from unauthorized use. Prominent emergency button located on the top of the machine allows operators to stop the laser and the motion carriage immediately to provide a safe operating environment.

Easy to Use Control Panel

A control panel with coherent hot-key design and graphic icon displays that allows you to directly change the laser parameter setting, set jobs to repeat unlimited times, queue jobs, delete jobs, and more.

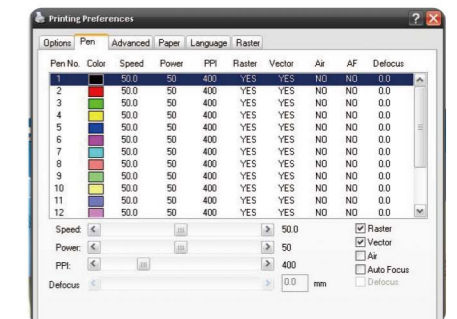

Innovative Software Features

Various user friendly features such as SmartCENTER, Defocus by pen, allows users to reduce set up time and make easy adjustments to achieve marvelous output quality.