# IFUME 400i 1704002 (90-254v)

# Hand & Machine Soldering

# FUME FILTRATION

T. 336-288-1613

13 eMail: Sales@fumefiltration.com

# FEATURES

- · Full colour touch screen display
- Highest grade HEPA and carbon technology
- Automatic electronic flow control maintains a constant extraction rate even as the filter blocks
- · Gas and particle sensors to warn the operator
- · Operate worldwide with no loss of performance

## INCLUDED AS STANDARD...

#### **FILTERS**



- Main Filter Code MPEF-113505
- **Description** HEPA/Chemical



Pre-filter Code MPEF-202268

Single111057

**Description** F6 Labyrinth

### **CONNECTION KIT**

Connection kit is included see overleaf for options

Voltage	90v - 254v
Part Number	1704002
Wattage	1.1kW
_	

**SPECIFICATIONS** 


Wattage	1.1kW
Frequency	50Hz / 60Hz
Cabinet Height	1070mm
Cabinet Width	528mm
Cabinet Depth	465mm
Cabinet Weight	60Kg
Sound Level	<60dBa
Airflow	400m3/h

#### Find out more:




#### Machine Supplied With • 1 x Main Filter • 1 x Pre-filter • 1 x Connection Kit • 1 x Power Cable • 1 x Manual

**OPTIONS** 

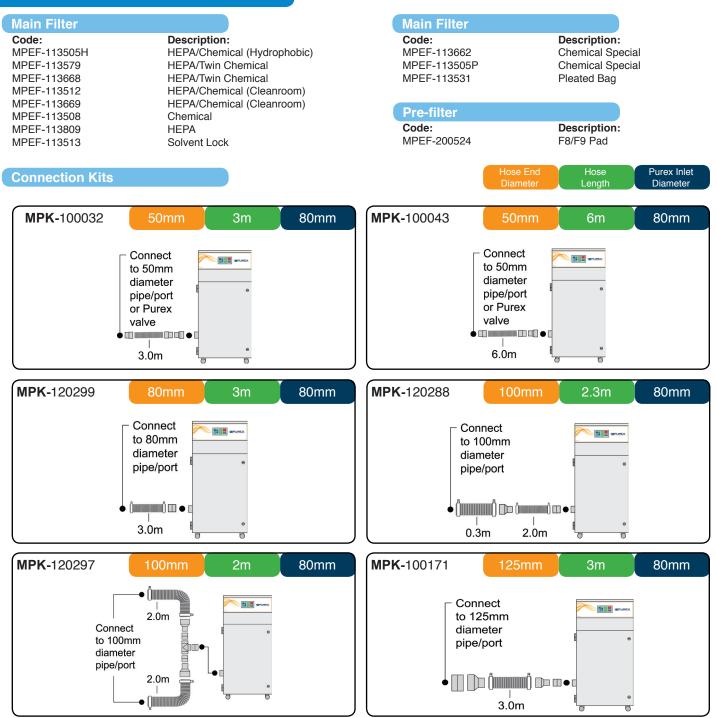

If you do not see a connection kit that fits your machine or pipework, please contact Purex or your representative

#### Interfacing



T. 336-288-1613

UME FILTRATION

eMail: Sales@fumefiltration.com

Interfacing can remotely start the Purex machine when the connected machine starts.

Interfacing can also warn the connected machine when the Purex machine is in alarm.

Take a look through our Interfacing Guide to see our extensive range of options

Jorlink USA.Inc, 3714 Alliance Dr., Suite 100 Greensboro, NC 27407 sales@jorlink.com sales@fumefiltration.com Tel (336) 288-1613

REV 090324 EDU