## **ALPHA**

0AL4103 120v 0AL4102 230v

# FUME FILTRATION

T. 336-288-1613

eMail: Sales@fumefiltration.com

# FEATURES

- VariColour filter blocked warning system
- Highest grade HEPA and carbon technology
- · Automatic electronic flow control maintains a constant extraction rate even as the filter blocks
- Quiet in operation
- Simple to install and easy to relocate

## INCLUDED AS STANDARD...



- **Main Filter** Code MPEF-113505
- Description **HEPA/Chemical**



**Pre-filter** Code MPEF-202269 Single 111085

Description F6 Labyrinth

### Voltage 120v 230v 0AL4103 0AL4102 Part Number Wattage 1.1kW 1.2kW Frequency 50Hz / 60Hz 50Hz / 60Hz Cabinet Height 885mm 885mm Cabinet Width 465mm 465mm 430mm 430mm Cabinet Depth Cabinet Weight 55kg 55kg Sound Level <60dBa <60dBa Airflow 400m3/h 400m3/h

## Find out more:



しり


www.FumeFiltration.com sales@fumefiltration.com sales@jorilnk.com +1 (336)288-1613

## **CONNECTION KIT**

Connection kit is included see overleaf for options


# **SPECIFICATIONS FILTERS**



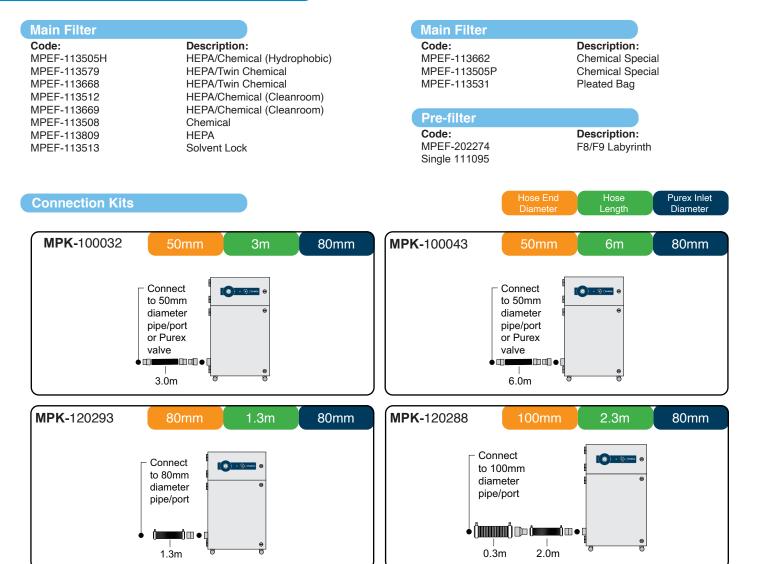

If you do not see a connection kit that fits your machine or pipework, please contact Purex or your representative

### Interfacing



Interfacing can remotely start the Purex machine when the connected machine starts.

Interfacing can also warn the connected machine when the Purex machine is in alarm.

Take a look through our Interfacing Guide to see our extensive range of options



Jorlink USA.Inc, 3714 Alliance Dr., Suite 100 Greensboro, NC 27407 sales@jorlink.com sales@fumefiltration.com Tel (336) 288-1613

REV090324EDU